

100% process safe standard solution against tool pull out

PROCESS SECURITY


No tool pull out and thus no costly rework or even damages to the workpieces.

STANDARD


Form-fitting clamping of standard tools with endmill flat for the advanced machining with complete security.

secuRgrip®


The threaded insert is designed to fit in every endmill flat – 100% security with a nut.



secuRgrip® is available for all standard tools with endmill flat, without additional modifications




Excellent vibration dampening



Increased productivity through security of process

Avoid tool pull out

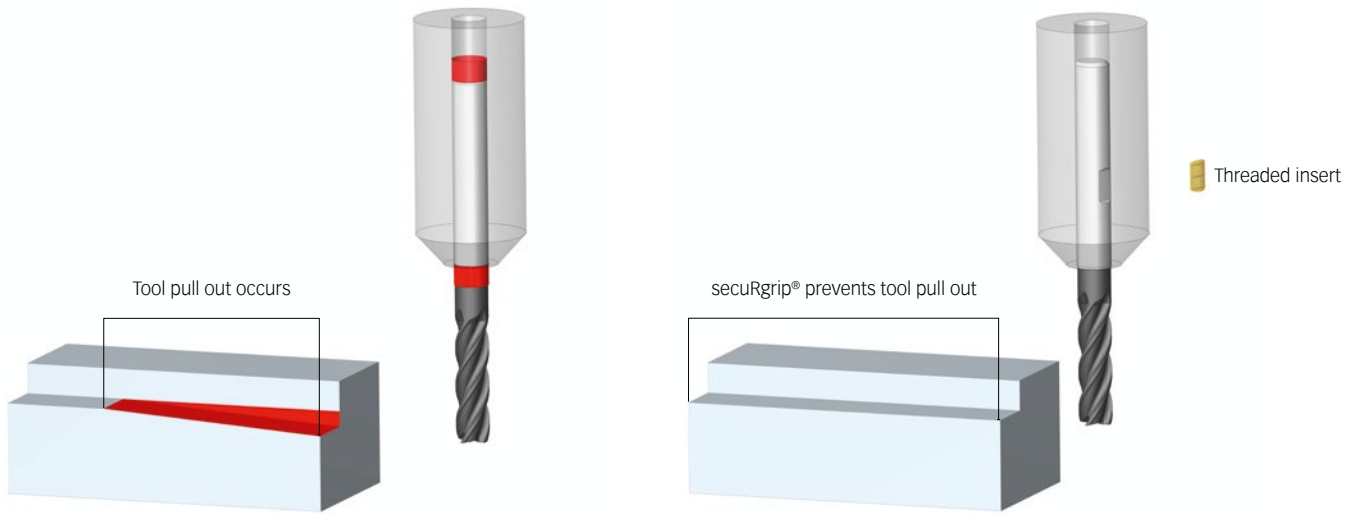

Changes in length can cause damages to the workpiece.

Workpiece damages are impossible thanks to REGO-FIX secuRgrip®.

Product overview



secuRgrip® for powRgrip®

Collets PG 15-SG, PG 25-SG and PG 32-SG
For shank diameter 10 – 25.4 mm (h6 tolerance)

Every standard PG toolholder for PG 15 to PG 32 can be produced/modified to PG-SG toolholder.

The PG toolholder head has a thread and the secuRgrip® safety nut secures the PG-SG collet in the toolholder.



secuRgrip® for ER Systems

Collets ER 32-SG and ER 40-SG
For shank diameter 10 – 25.4 mm (h6 tolerance)

The change from ER collet to an ER-SG collet makes every REGO-FIX ER toolholder to an ER-SG toolholder. No modifications on the toolholder are required.

